

Pro Power SB (R)


Pure Sine Wave Inverters with USB and RCD Version

Pure Sine Wave Inverters. Replicates true shore power, suitable for all appliances.
 - With Twin Socket or built in RCD.
 - Adjustable between **Neutral Earth Bonding** and **Centre Tapping**.
 - **No DC cables supplied.**



Option 1
 Twin socket adjustable between centre tapped earth and neutral earth bonding. USB charger.

Optional remote control with 10 metres of cable.

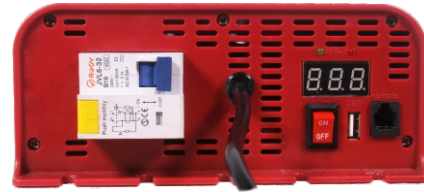

Option 2
 Pre-wired RCD
 Centre tapped earth and Neutral earth bonded.
 With USB charger


230V Pure Sine Wave 50 Hz AC inverters 12V DC and 24V DC 200W - 3500W

Model	Weight	Size L x W x D mm	Cables	SKU
12V 200W Twin sockets	1.4 kg	210x190x85	1m Cig plug	SIB12200
12V 300W Twin sockets	1.4 kg	210x190x85	1m DC 8 mm ring	SIB12300
12V 600W Twin sockets	2.2 kg	250x190x85	1m DC 8 mm ring	SIB12600
12V 1000W Twin sockets	2.0 kg	300x190x85	1m DC 8 mm ring	SIB121000
12V 1600W Twin sockets	3.6 kg	300x190x85	8 mm connection	SIB121600
12V 2500W Twin socket with RCD	5.0 kg	300x190x160	8 mm connection	SIB122500
12V 3500W Twin socket with RCD	5.0 kg	360x190x160	8 mm connection	SIB123500
12V 1600W single yellow 110V	3.6 kg	300x190x85	8 mm connection	SIB121600
<hr/>				
24V 200W Twin sockets	1.4 kg	210x190x85	1m Cig plug	SIB24200
24V 300W Twin sockets	1.4 kg	210x190x85	1m DC 8 mm ring	SIB24300
24V 600W Twin sockets	2.2 kg	250x190x85	1m DC 8 mm ring	SIB24600
24V 1000W Twin sockets	2.0 kg	300x190x85	1m DC 8 mm ring	SIB241000
24V 1600W Twin sockets	3.6 kg	300x190x85	8 mm connection	SIB241600
24V 2500W Twin socket with RCD	5.0 kg	300x190x160	8 mm connection	SIB242500
24V 3500W Twin socket with RCD	5.0 kg	360x190x160	8 mm connection	SIB243500
24V 1600W single yellow 110V	3.6 kg	300x190x85	8 mm connection	SIB241600
<hr/>				
12V 1000W with RCD	2.0 kg	300x190x85	1m DC 8 mm ring	SIBR121000
12V 1600W with RCD	3.6 kg	300x190x85	8 mm connection	SIBR121600
<hr/>				
24V 1000W with RCD	2.0 kg	300x190x85	1m DC 8 mm ring	SIBR241000
24V 1600W with RCD	3.6 kg	300x190x85	8 mm connection	SIBR241600
Remote control (fits all models)		90x60x20	10 metre	SWR

Pre-fitted and wired RCD option with 1 meter AC cable



Twin sockets: UK and Euro
 30 mA / RCD option to hard wire AC.
 12mm DC studs

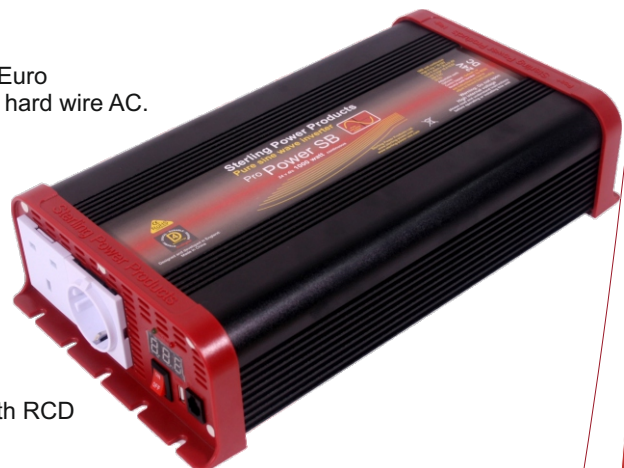

New 2500W and 3500W models with RCD

New 230V 12V DC and 24V DC 2500 - 3500 50 Hz Pure Sine Wave inverters					
Model	Centre tapped Earth	Weight	Size L x W x D mm	Cables	SKU
12V 2500W	double socket plus RCD	6 kg	280x260x185	12 mm connection	SIB122500
12V 3500W	double socket plus RCD	8 kg	300x260x185	12 mm connection	SIB123500
<hr/>					
24V 2500W	double socket plus RCD	6 kg	280x260x185	12 mm connection	SIB242500
24V 3500W	double socket plus RCD	8 kg	300x260x185	12 mm connection	SIB243500

New 12V and 24V 1600 Watt Pure Sine Wave 110V 50Hz fitted with yellow socket for site use				
Model	Weight Kg	Size L x W x D mm	Cables	Part number
12V 1600W	3.6	300x190x85	8 mm connection	ASIB121600
24V 1600W	3.6	300x190x85	8 mm connection	ASIB241600